



Protective Cover
Bayonet Locking Style
(Zinc Die-Cast Version)


Ball Chain
Assembly

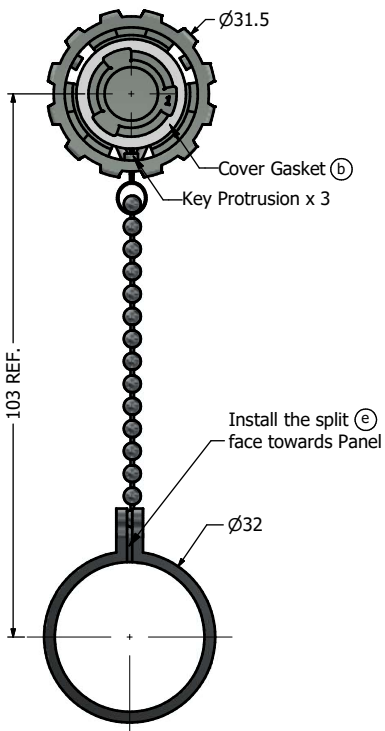


Install the split (e)
face towards Panel

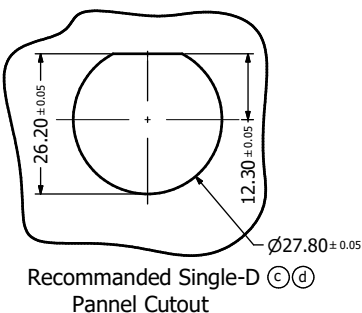





Recommended Single-D (c)(d)
Pannel Cutout

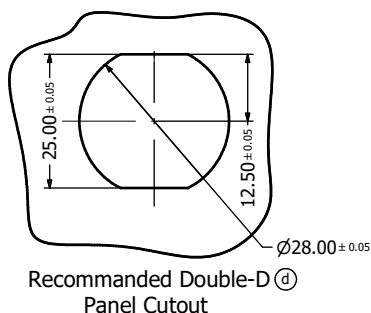

Recommended Double-D (d)
Panel Cutout

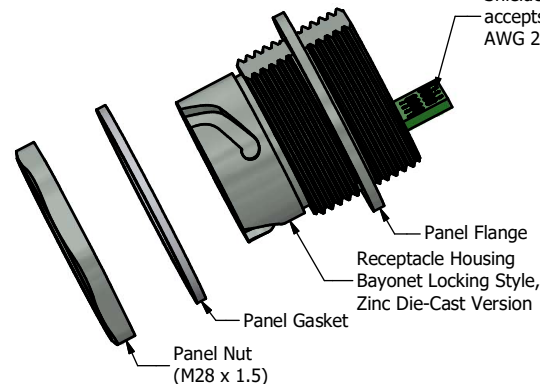

Shielded Cat. 5e RJ45 PCB Jack
accepts both Solid and Stranded
AWG 24 to 26 Wires

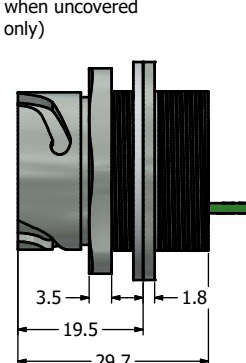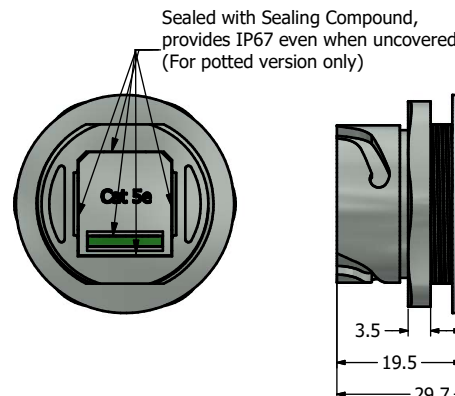

Notes:

- Electrical Specifications:
 - Meets EIA/TIA-568-B.2 Cat.5e Specification
 - Contact Resistance: 20mOhm max.
 - Insulation Resistance: 500MOhm min. @ 100 VDC
 - Current Rating: 1.2A max. at 25°C
 - Working Voltage: 100 VDC
 - DWV: 1000 VDC/60s Contact to Contact, 1500 VDC/60s Contact to Metal Shell
 - Operating Temperature: -40°C to +85°C
- Material and Finish:
 - Receptacle Housing & Protective Cover: Zinc Die-cast, Nickel Plated
 - Ball Chain Assembly: Copper Alloy and Stainless Steel, Nickel Plated
 - Panel Nut: Brass, Finish: Nickel Plated
 - Panel Gasket: Silicon, Color: White
 - Cover gasket: Silicon, Color: White
 - RJ45 PCB Jack Metal Shell: Copper Alloy, Nickel Plated
 - RJ45 PCB Jack Plastic Housing: Glass filled PBT UL94 V-0, Color: Black
 - RJ45 PCB Jack Contacts: Phosphor Bronze, Finish: 50u" Gold min. over Nickel
- Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.
- IP67 rated when fully mated with the appropriate connector
- Recommended Mounting Panel Nut Torque is 20 to 25 lb-inch

RoHS compliant

(b) (d)	Description	Part Number
	Nickel Plated Zinc Die-Cast with Shielded Cat5e PCB Jack & Protective Cover	17-101844
	Potted Nickel Plated Zinc Die-Cast with Shielded Cat5e PCB Jack & Protective Cover	17-102204

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION	DOT NOT ALTER CAD DRAWING BY HAND	Customer:				Tolerance Unless otherwise specified			Scale: 1.5:1	Dim. in mm		
		Name		Title	Approval Date	0 PLC ±0.50 1 PLC ±0.38 2 PLC ±0.25 3 PLC ±0.10 ANGLES ±3°	Autodesk Inventor					
							2010	Date	Name	Title: Receptacle Assembly Kit & Cover with Cat. 5e RJ45 PCB Jack Nickel Plated Zinc Die-Cast Version		
		1 x f	A21-0426	26.10.2021	Bub	Draw.	May 20	Vincent Ke				
		e	1 x e	Apr/10/2014	Vincent Ke	Appd.	May 20	J. Chaudry				
		d	4 x d	Mar/02/2011	Vincent ke	Norm						
		c	1 x c	Jan/28/2011	Vincent ke	D-old						
		b	2 x b	Jan/25/2011	Vincent ke				Drawing No.: 17K1A151	DIN A3		
		a	original						Part No.: SEE TABLE ABOVE	Sheet 1/1		
		Rev.	Changes	Date	Name							